



Model : JSSG600-A

Specification	
Product Name	Solar Generator
Usage	Outdoor Powered
Brand	JSS
Features	
Run Time	Continuous discharge time of 17 hours when fully charged
Time of Charge	14 : 1714 : 1714 : 17
Wind Rating Speed	100kph
Protection Level	IP65
Dimension and Weight	
Size (not include mast)	4750*2080*3318mm
Weight	1890KGS
20' container can be fit	2 sets
Solar Panel and Battery	
Solar Panel	300W*4 monocrystalline silicon
Battery	200AH*8free maintenance
Lamp and Mast	
Lamp	LED outdoor lamp with Bridgelux
Power of Lamp	100W*6
Mast Height	7.5 meters
Trailer	
Axle	Dual
Tire	Maxxis A/T R15
Drawbar	A-type drawbar with grating plate
Brake System	Electric brake with pintle ring hitch or 50mm ball hitch & wheel chock
Shock Absorber	Rocker roller spring
Tail Lamp	ADR Standard
Outrigger	7000LBS jack and high strength square tube
Fire Extinguisher	SAI/EN3/CE Certification
Electrical Parts	
Solar Controller	US Morningstar MPPT/Chinese MPPT
Breaker,Relay,switch,Cable and Connector etc.	All electrical parts have UL Certification
Diesel Generator Backup	3KW
Other	
Packing	Plywood Case/Wooden Case/EPE Foam
Price (EXW)	
Standard Configuration	
Packing cost for single transport	
Packing cost for one 20' container	
Warranty	3 years or 7500 hours whichever comes first




Model : JSS30-A

Specification	
Product Name	Solar Light Tower
Usage:	Outdoor Lighting
Brand	JSS
Features	
Run Time	Continuous discharge time of 45 hours when fully charged
Time proportion of charge and discharge	1 : 21 : 21 : 2
Wind Rating Speed	100kph
Protection Level	IP65
Dimension and Weight	
Size (not include mast)	1200*600*1100mm
Weight	205KGS
20' container can be fit	20 sets
Solar Panel and Battery	
Solar Panel	50W*2 monocrystalline silicon
Battery	150AH*1 free maintenance
Lamp and Mast	
Lamp	LED outdoor lamp with Bridgelux
Power of Lamp	30W*1
Mast Height	5.5 meters
Trolley	
Tire	Rubber tire 8"
Armrest	Integrated
Outrigger	Jack and square tube
Electrical Parts	
Solar Controller	US Morningstar MPPT/Chinese MPPT
Breaker,Relay,Switch,Cable and Connector etc.	All electrical parts have UL Certification
Other	
Packing	Plywood Case/wooden Case/EPE Foam
Price (EXW)	
Standard Configuration	
Packing cost for single transport	
Packing cost for one 20' container	
Warranty	3 years or 7500 hours whichever comes first



Model : JSS240-A

Specification	
Product Name	Solar Light Tower
Usage:	Outdoor Lighting
Brand	JSS
Features	
Run Time	Continuous discharge time of 33 hours when fully charged
Time proportion of charge and discharge	15 : 33 15 : 33 15 : 33
Wind Rating Speed	100kph
Protection Level	IP65
Dimension and Weight	
Size (not include mast)	3780*1520*2015mm
Weight	1050KGS
20' container can be fit	4 sets
Solar Panel and Battery	
Solar Panel	300W*3 monocrystalline silicon
Battery	150AH*6 free maintenance
Lamp and Mast	
Lamp	LED outdoor lamp with Bridgelux
Power of Lamp	60W*4
Mast Height	7.5 meters
Trailer	
Axle	Single
Tire	Maxxis A/T R15
Drawbar	A-type drawbar with grating plate
Brake System	Bump brake (pintle ring hitch/50mm ball hitch) & brake disc assembly & wheel chock
Shock Absorber	Double eye leaf spring
Tail Lamp	ADR Standard
Outrigger	7000LBS jack and high strength square tube
Fire Extinguisher	SAI/EN3/CE Certification
Electrical Parts	
Solar Controller	US Morningstar MPPT/Chinese MPPT
Breaker,Relay,Switch,Cable and Connector etc.	All electrical parts have UL Certification
Other	
Packing	Plywood Case/Wooden Case/EPE Foam
Price (EXW)	
Standard Configuration	
Packing cost for single transport	
Packing cost for one 20' container	
Warranty	3 years or 7500 hours whichever comes first

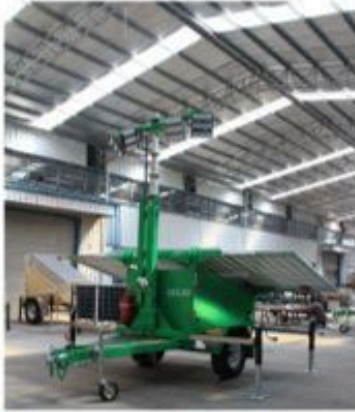

Model : JSS360-A

Specification	
Product Name	Solar Light Tower
Usage:	Outdoor Lighting
Brand	JSS
Features	
Run Time	Continuous discharge time of 22 hours when fully charged
Time proportion of charge and discharge	1 : 21 : 21 : 2
Wind Rating Speed	100kph
Protection Level	IP65
Dimension and Weight	
Size (not include mast)	4020*2080*2150mm
Weight	1290KGS
20' container can be fit	3 sets
Solar Panel and Battery	
Solar Panel	300W*4 monocrystalline silicon
Battery	150AH*6 free maintenance
Lamp and Mast	
Lamp	LED outdoor lamp with Bridgelux
Power of Lamp	90W*4
Mast Height	7.5 meters
Trailer	
Axle	Single
Tire	Maxxis A/T R15
Drawbar	A-type drawbar with grating plate
Brake System	Bump brake (pintle ring hitch/50mm ball hitch) & brake disc assembly & wheel chock
Shock Absorber	Double eye leaf spring
Tail Lamp	ADR Standard
Outrigger	7000LBS jack and high strength square tube
Fire Extinguisher	SAI/EN3/CE Certification
Electrical Parts	
Solar Controller	US Morningstar MPPT/Chinese MPPT
Breaker,Relay,Switch,Cable and Connector etc.	All electrical parts have UL Certification
Other	
Packing	Plywood Case/Wooden Case/EPE Foam
Price (EXW)	
Standard Configuration	
Packing cost for single transport	
Packing cost for one 20' container	
Warranty	3 years or 7500 hours whichever comes first



Model : JSS400-A

Specification	
Product Name	Solar Light Tower
Usage:	Outdoor Lighting
Brand	JSS
Features	
Run Time	Continuous discharge time of 28 hours when fully charged
Time proportion of charge and discharge	1 : 21 : 21 : 2
Wind Rating Speed	100kph
Protection Level	IP65
Dimension and Weight	
Size (not include mast)	4020*2080*2150mm
Weight	1380KGS
20' container can be fit	3 sets
Solar Panel and Battery	
Solar Panel	300W*4 monocrystalline silicon
Battery	150AH*8 free maintenance
Lamp and Mast	
Lamp	LED outdoor lamp with Bridgelux
Power of Lamp	100W*4
Mast Height	7.5 meters
Trailer	
Axle	Single
Tire	Maxxis A/T R15
Drawbar	A-type drawbar with grating plate
Brake System	Bump brake (pintle ring hitch/50mm ball hitch) & brake disc assembly & wheel chock
Shock Absorber	Double eye leaf spring
Tail Lamp	ADR Standard
Outrigger	7000LBS jack and high strength square tube
Fire Extinguisher	SAI/EN3/CE Certification
Electrical Parts	
Solar Controller	US Morningstar MPPT/Chinese MPPT
Breaker,Relay,Switch,Cable and Connector etc.	All electrical parts have UL Certification
Other	
Packing	Plywood Case/Wooden Case/EPE Foam
Price (EXW)	
Standard Configuration	
Packing cost for single transport	
Packing cost for one 20' container	
Warranty	3 years or 7500 hours whichever comes first



Model : JSS600-A

Specification	
Product Name	Solar Light Tower
Usage:	Outdoor Lighting
Brand	JSS
Features	
Run Time	Continuous discharge time of 17 hours when fully charged
Time proportion of charge and discharge	14 : 1714 : 1714 : 17
Wind Rating Speed	100kph
Protection Level	IP65
Dimension and Weight	
Size (not include mast)	4020*2080*2150mm
Weight	1430KGS
20' container can be fit	3 sets
Solar Panel and Battery	
Solar Panel	300w*4 monocrystalline silicon
Battery	150AH*8 Free maintenance
Lamp and Mast	
Lamp	LED outdoor lamp with Bridgelux
Power of Lamp	100w*6
Mast Height	7.5 meters
Trailer	
Axle	Single
Tire	Maxxis A/T R15
Drawbar	A-type drawbar with grating plate
Brake System	Bump brake (pintle ring hitch/50mm ball hitch) & brake disc assembly & wheel chock
Shock Absorber	Double eye leaf spring
Tail Lamp	ADR Standard
Outrigger	7000LBS jack and high strength square tube
Fire Extinguisher	SAI/EN3/CE Certification
Electrical Parts	
Solar Controller	US Morningstar MPPT/Chinese MPPT
Breaker,Relay,Switch,Cable and Connector etc.	All electrical parts have UL Certification
Other	
Packing	Plywood Case/Wooden Case/EPE Foam
Price (EXW)	
Standard Configuration	
Packing cost for single transport	
Packing cost for one 20' container	
Warranty	3 years or 7500 hours whichever comes first